

KF552C36BBEAK2-16

16GB (8GB 1G x 64-Bit x 2 pcs.) DDR5-5200 CL36 288-Pin DIMM Kit



SPECIFICATIONS

40 cycles
48ns(min.)
295ns(min.)
32ns(min.)
94 V - 0
0° C to +85° C
-55° C to +100° C

DESCRIPTION

Kingston FURY KF552C36BBEAK2-16 is a kit of two 1G x 64-bit (8GB) DDR5-5200 CL36 SDRAM (Synchronous DRAM) 1Rx16, memory module, based on four 1G x 16-bit FBGA components per module. Each module kit supports AMD® EXPO v1.0 and Intel® Extreme Memory Profiles (Intel® XMP) 3.0. Total kit capacity is 16GB. Each module has been tested to run at DDR5-5200 at a low latency timing of 36-40-40 at 1.25V. The SPDs are programmed to JEDEC standard latency DDR5-4800 timing of 40-39-39 at 1.1V. Each 288-pin DIMM uses gold contact fingers. The JEDEC standard electrical and mechanical specifications are as follows:

FEATURES

- Power Supply: VDD = 1.1V Typical
- VDDQ = 1.1V Typical
- VPP = 1.8V Typical
- VDDSPD = 1.8V to 2.0V
- On-Die ECC
- Height 1.66" (42.23mm), w/heatsink

FACTORY TIMING PARAMETERS


• EXPO Profile #1:	DDR5-4800 CL38-38-38 @1.1V
• EXPO Profile #0:	DDR5-5200 CL36-40-40 @1.25V
 Default (JEDEC): 	DDR5-4800 CL40-39-39 @1.1V

- XMP Profile #1: DDR5-5200 CL36-40-40 @1.25V
- XMP Profile #2: DDR5-4800 CL38-38-38 @1.1V


Continued >>



MODULE WITH HEAT SPREADER

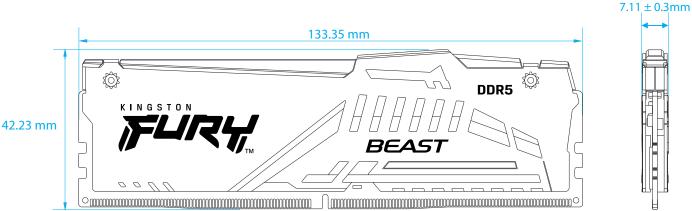

MODULE DIMENSIONS

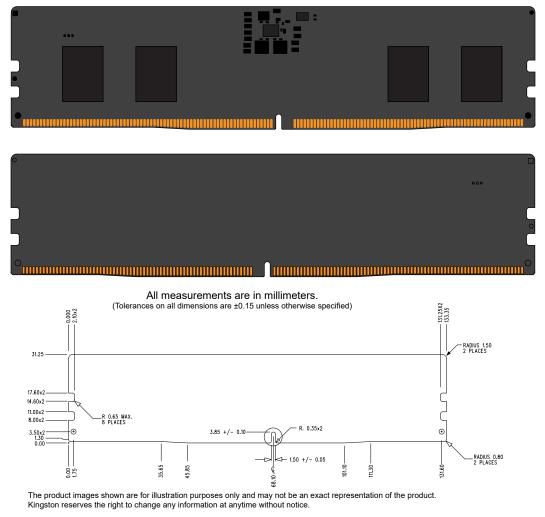

FOR MORE INFORMATION, GO TO KINGSTON.COM

All Kingston products are tested to meet our published specifications. Some motherboards or system configurations may not operate at the published Kingston FURY memory speeds and timing settings. Kingston does not recommend that any user attempt to run their computers faster than the published speed. Overclocking or modifying your system timing may result in damage to computer components.