

## KSM24RS8/8MAI

8GB 1Rx8 1G x 72-Bit PC4-2400

CL17 Registered w/Parity 288-Pin DIMM

### DESCRIPTION

Kingston's KSM24RS8/8MAI is a 1G x 72-bit (8GB) DDR4-2400 CL17 SDRAM (Synchronous DRAM) registered w/ parity, 1Rx8, ECC, memory module, based on nine 1G x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-2400 timing of 17-17-17 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

### FEATURES

- Power Supply: VDD=1.2V
- VDDQ = 1.2V
- VPP - 2.5V
- VDDSPD=2.25V to 2.75V
- Functionality and operations comply with the DDR4 SDRAM datasheet
- 16 internal banks
- Bank Grouping is applied, and CAS to CAS latency (tCCD\_L, tCCD\_S) for the banks in the same or different bank group accesses are available
- Data transfer rates: PC4-2400, PC4-2133, PC4-1866, PC4-1600
- Bi-Directional Differential Data Strobe
- 8 bit pre-fetch
- Burst Length (BL) switch on-the-fly BL8 or BC4(Burst Chop)
- Supports ECC error correction and detection
- On-Die Termination (ODT)
- Temperature sensor with integrated SPD
- This product is in compliance with the RoHS directive.
- Per DRAM Addressability is supported
- Internal Vref DQ level generation is available
- Write CRC is supported at all speed grades
- CA parity (Command/Address Parity) mode is supported

### SPECIFICATIONS

CL(IDD)	17 cycles
Row Cycle Time (tRCmin)	46.16ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
Maximum Operating Power	*
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

\* See IDD Table (page 2)




### Module Assembly

<b>DRAM:</b> MICRON (A-DIE)
<b>RCD:</b> IDT

## IDD Specifications

Symbol	2400	Units
I <sub>DD0</sub>	540	mA
I <sub>PP0</sub>	27	mA
I <sub>DD1</sub>	675	mA
I <sub>DD2N</sub>	450	mA
I <sub>DD2NT</sub>	540	mA
I <sub>DD2P</sub>	270	mA
I <sub>DD2Q</sub>	405	mA
I <sub>DD3N</sub>	495	mA
I <sub>PP3N</sub>	27	mA
I <sub>DD3P</sub>	360	mA
I <sub>DD4R</sub>	1350	mA
I <sub>DD4W</sub>	1440	mA
I <sub>DD5R</sub>	576	mA
I <sub>PP5R</sub>	45	mA
I <sub>DD6N</sub>	270	mA
I <sub>DD6E</sub>	315	mA
I <sub>DD6R</sub>	225	mA
I <sub>DD6A</sub>	180	mA
I <sub>DD6A</sub>	225	mA
I <sub>DD6A</sub>	315	mA
I <sub>PP6X</sub>	45	mA
I <sub>DD7</sub>	1845	mA
I <sub>PP7</sub>	135	mA
I <sub>DD8</sub>	180	mA

## MODULE DIMENSIONS

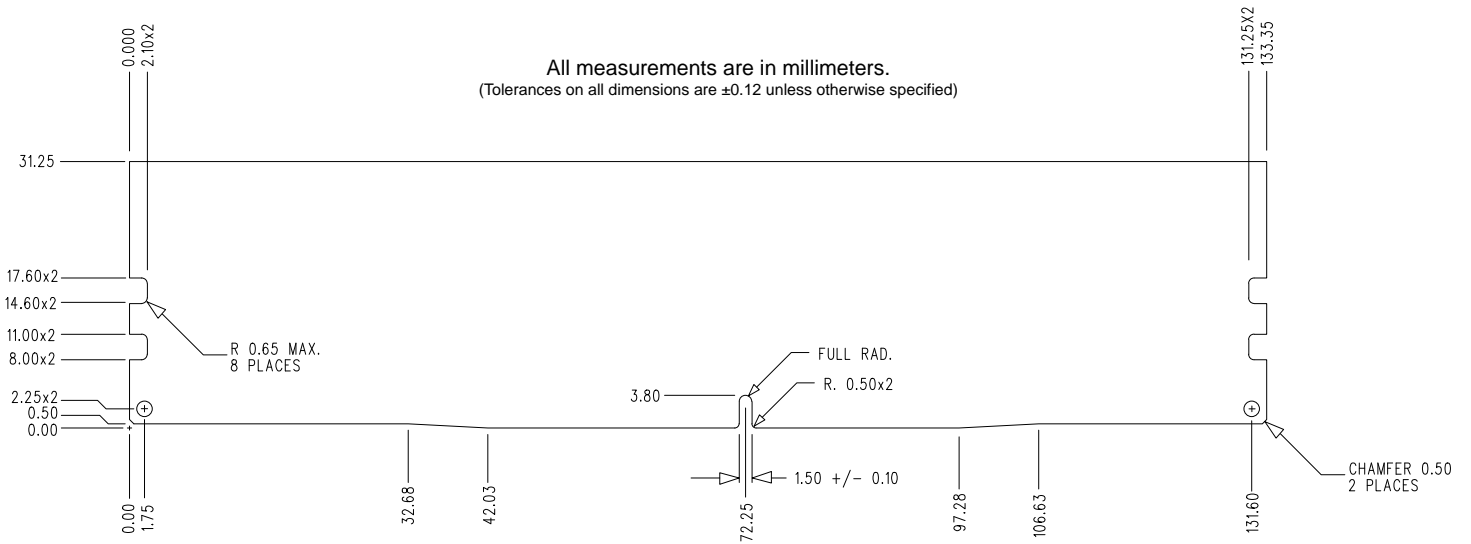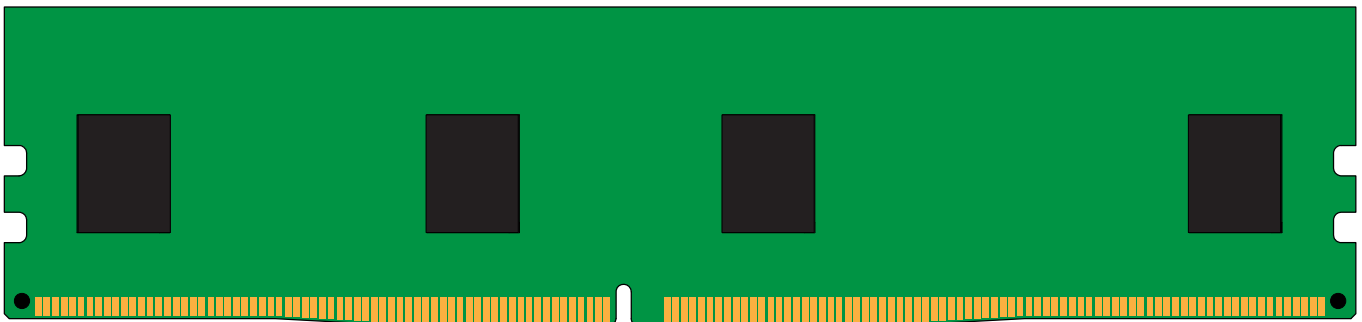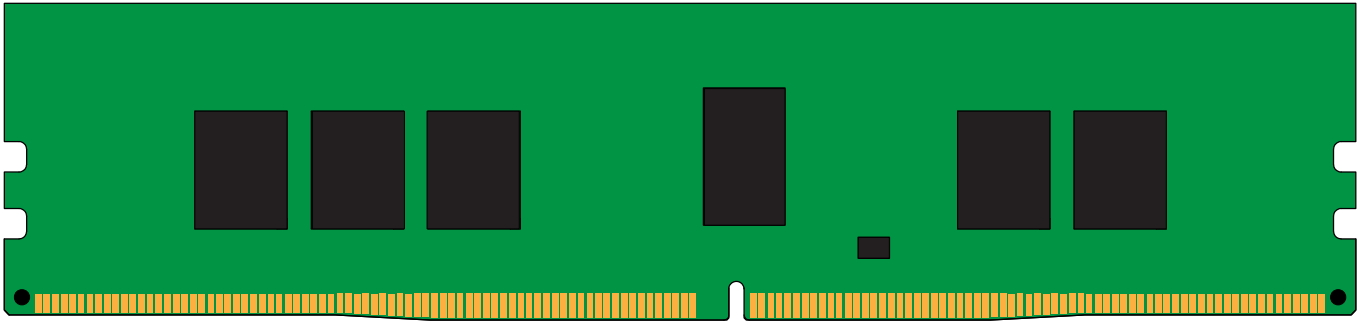

The product images shown are for illustration purposes only and may not be an exact representation of the product. Kingston reserves the right to change any information at anytime without notice.