

Memory Module Specifications

KVR26N19S6K2/8

8GB (4GB 1Rx16 512M x 64-Bit x 2 pcs.) PC4-2666

CL19 288-Pin DIMM

DESCRIPTION

This document describes ValueRAM's KVR26N19S6K2/8 is a kit of two 512M x 64-bit (4GB) DDR4-2666 CL19 SDRAM (Synchronous DRAM), 1Rx16, memory module, based on four 512M x 16-bit FBGA components. Total kit capacity is 8GB. The SPD is programmed to JEDEC standard latency DDR4-2666 timing of 19-19-19 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Low-power auto self refresh (LPASR)
- Data bus inversion (DBI) for data bus
- On-die VREFDQ generation and calibration
- Single-rank
- On-board I2 serial presence-detect (SPD) EEPROM
- 8 internal banks; 2 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Fly-by topology
- Terminated control command and address bus
- PCB: Height 1.23" (31.25mm)
- RoHS Compliant and Halogen-Free


SPECIFICATIONS

CL(IDD)	19 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

Continued >>

The image shows two green printed circuit boards (PCBs) stacked vertically. The top PCB is populated with several dark grey components: two large square integrated circuits (ICs) on the left, a small square component in the center, and two more large square ICs on the right. A row of small, gold-colored surface-mount components runs along the bottom edge of the top board. The bottom PCB is empty, showing only the green solder mask and the same row of gold-colored components along its bottom edge. Both boards have white mounting tabs on their left and right sides.

All measurements are in millimeters.
(Tolerances on all dimensions are ± 0.12 unless otherwise specified)

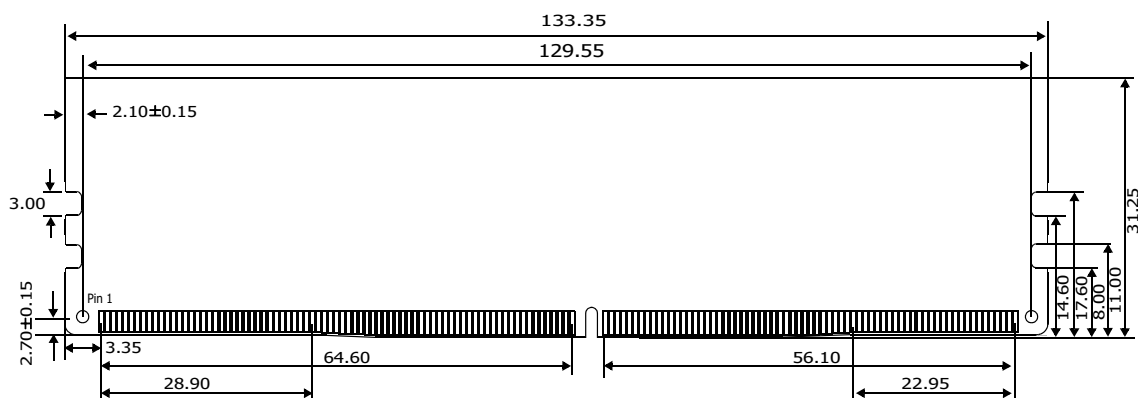

The product images shown are for illustration purposes only and may not be an exact representation of the product. Kingston reserves the right to change any information at anytime without notice.